

MODEL 258


Free Area in Square Feet And Square Meters

Free Area AMCA Licensed for openings up to 72" X 120".
For free area data for larger openings, contact factory.

FREE AREA IN SQUARE FEET AND SQUARE METERS


3048. mm	0.475	1.044	1.614	2.183	2.753	3.322
120"	5.110	11.240	17.370	23.500	29.630	35.76
2743.2 mm	0.426	0.937	1.448	1.959	2.470	2.981
108"	4.586	10.087	15.589	21.090	26.592	32.093
2438.4 mm	0.377	0.830	1.283	1.735	2.188	2.641
96"	4.061	8.934	13.807	18.680	23.554	28.427
2133.6 mm	0.329	0.723	1.117	1.511	1.906	2.300
84"	3.537	7.781	12.026	16.271	20.515	24.760
1828.8 mm	0.280	0.616	0.952	1.288	1.623	1.959
72"	3.012	6.628	10.245	13.861	17.477	21.093
1524. mm	0.231	0.509	0.786	1.064	1.341	1.619
60"	2.488	5.476	8.463	11.451	14.439	17.427
1219.2 mm	0.182	0.401	0.621	0.840	1.059	1.278
48"	1.963	4.323	6.682	9.041	11.401	13.760
914.4 mm	0.134	0.294	0.455	0.616	0.777	0.937
36"	1.439	3.170	4.901	6.632	8.362	10.093
609.6 mm	0.085	0.187	0.290	0.392	0.494	0.597
24"	0.914	2.017	3.119	4.222	5.324	6.427
304.8 mm	0.036	0.080	0.124	0.168	0.212	0.256
12"	0.390	0.864	1.338	1.812	2.286	2.76
H/W	304.8 mm	609.6 mm	914.4 mm	1219.2 mm	1524. mm	1828.8 mm
	12"	24"	36"	48"	60"	72"

Performance Chart

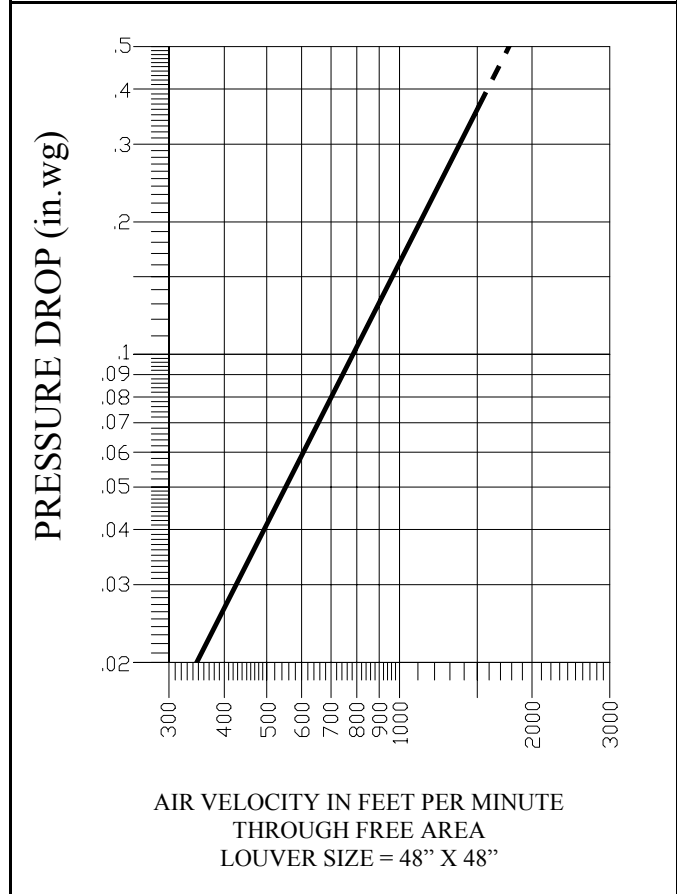

The AMCA Certified Ratings Seal applies to Air Capacities in the intake mode only.

Water Penetration Chart

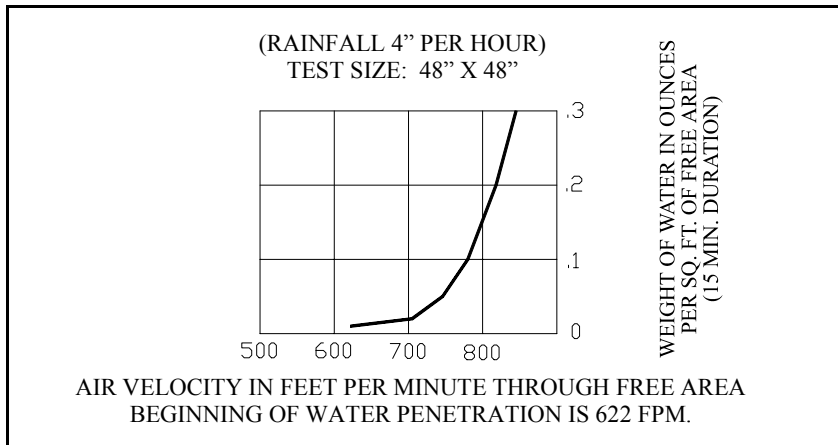

Ratings do not include the effect of a bird screen.

NOTE: All tests are for standard .075 lb./cu. ft.

CATALOG NO. 258

Rev: JANUARY 2004



Industrial Louvers, Inc. certifies that Model 258 shown hereon is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.

