

MODEL 450XP


Free Area in Square Feet And Square Meters

Free Area AMCA Licensed for openings up to 72" X 120".
For free area data for larger openings, contact factory.

FREE AREA IN SQUARE FEET AND SQUARE METERS


3048. mm	0.435	0.957	1.479	2.001	2.523	3.045
120"	4.680	10.300	15.920	21.540	27.160	32.78
2743.2 mm	0.390	0.858	1.326	1.794	2.262	2.729
108"	4.196	9.233	14.271	19.308	24.346	29.383
2438.4 mm	0.345	0.759	1.173	1.586	2.000	2.414
96"	3.711	8.166	12.621	17.076	21.532	25.987
2133.6 mm	0.300	0.660	1.019	1.379	1.739	2.098
84"	3.227	7.099	10.972	14.845	18.717	22.590
1828.8 mm	0.255	0.561	0.866	1.172	1.477	1.783
72"	2.742	6.032	9.323	12.613	15.903	19.193
1524. mm	0.210	0.461	0.713	0.964	1.216	1.467
60"	2.258	4.966	7.673	10.381	13.089	15.797
1219.2 mm	0.165	0.362	0.560	0.757	0.954	1.152
48"	1.773	3.899	6.024	8.149	10.275	12.400
914.4 mm	0.120	0.263	0.406	0.550	0.693	0.836
36"	1.289	2.832	4.375	5.918	7.460	9.003
609.6 mm	0.075	0.164	0.253	0.342	0.431	0.521
24"	0.804	1.765	2.725	3.686	4.646	5.607
304.8 mm	0.030	0.065	0.100	0.135	0.170	0.205
12"	0.320	0.698	1.076	1.454	1.832	2.210
H/W	304.8 mm	609.6 mm	914.4 mm	1219.2 mm	1524. mm	1828.8 mm
	12"	24"	36"	48"	60"	72"

Performance Chart

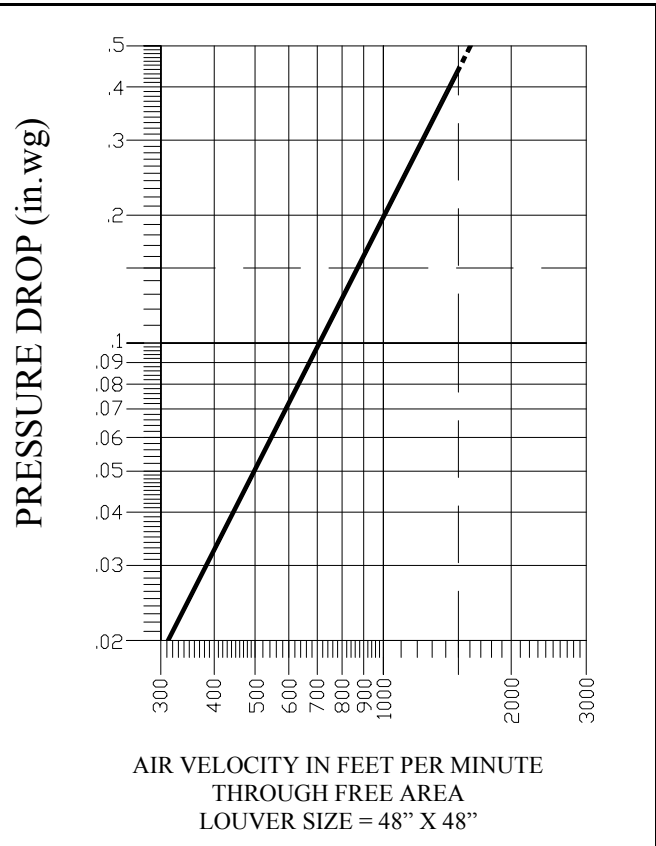

The AMCA Certified Ratings Seal applies to Air Capacities in the intake mode only.

Water Penetration Chart

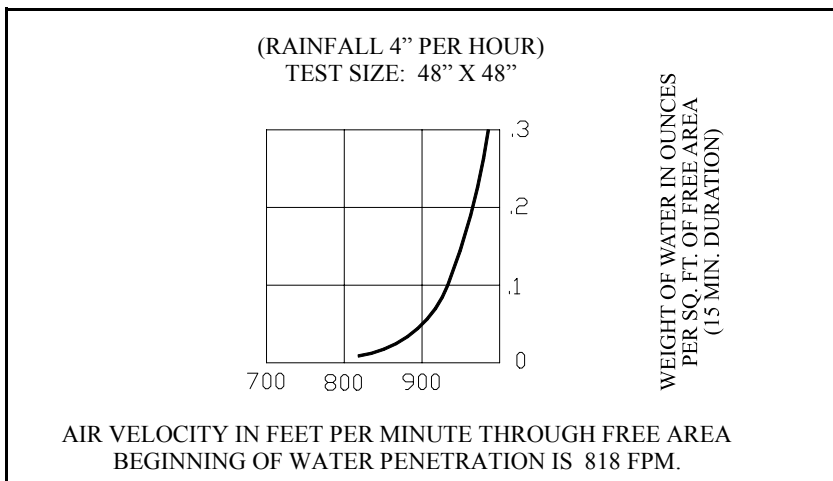

Ratings do not include the effect of a bird screen.

NOTE: All tests are for standard .075 lb./cu. ft.



Industrial Louvers, Inc. certifies that Model 450XP shown hereon is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.



CATALOG NO. 450XP

Rev: JANUARY 2004