
## **Steel and Steel/Aluminum Security Floor Doors**

- Flush cover styles are finished out flush with the concrete surface to present no obstruction or hazard to floor traffic.
- The patterned 3/16" steel or 1/4" aluminum metal surface cover provides safe, non-skid footing.
- Standard reinforced construction handles uniform loads of 150 psf.
- Hardware is mounted to zinc-plated, riveted, triple-leaf lift hinges, stop chain, and a rigid hold-open arm on each leaf.
- Cover is mounted to frame with cast steel hinges with torsion springs, complete with automatic hold-open arm and automatic snap latch. Fixed inside handle for access with removable outside handles for security access.
- Security floor doors are available in two materials to meet specific design criteria- steel, prime painted, FA Series and aluminum cover, steel frame, FC Series.
- Single leaf covers are equipped with automatic snap latch having fixed inside and removable outside handles. Double leaf covers are fixed with a throw bolt on the inactive leaf and a latching mechanism having fixed inside and removable outside handle on the active leaf.

PHOTO NOT AVAILABLE

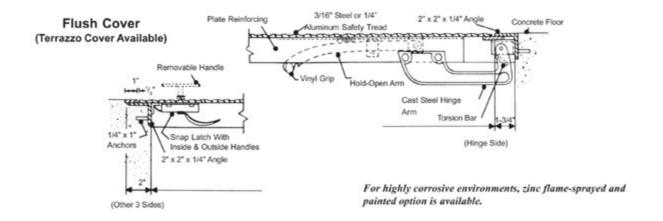

Specification
Cut Sheet
Submittal Drawing

Standard Sizes and Model Numbers (Custom sizes available)					
Number of Leafs	Dimensions (Door Opening Size-Second Dim. Hinge Side)	Steel, Prime Painted		Aluminum Cover/ Steel Frame	
		Model Number	Shipping Weight Lbs	Model Number	Shipping Weight Lbs
Single	2"-0" x 2'-0"	FA-1	140	FC-1	120
Single	2"-6" x 2'-6"	FA-2	160	FC-2	140
Single	3"-0" x 2'-6"	FA-3	175	FC-3	150
Single	3"-0" x 3'-0"	FA-4	195	FC-4	160
Single	3"-6" x 3'-6"	-	-	FC-5	200
Double	3"-6" x 3'-6"	FA-5	275	-	-
Double	2"-10" x 3'-4"	FA-6	240	FC-6	200
Double	3"-4" x 3'-10"	FA-7	300	FC-7	250
Double	3"-10" x 3'-10"	FA-8	340	FC-8	270
Double	4"-0" x 4'-0"	FA-9	350	FC-9	280
Double	4"-0" x 6'-0"	FA-10	440	FC-10	300
Double	5"-0" x 5'-0"	FA-11	450	FC-11	310

MILCOR • 815 KIMBERLY DRIVE • CAROL STREAM, IL 60188 • TEL: (800) 624-8642 • FAX: (866) 466-9335