*SCRAPES* grate<sup>™</sup>

## M-675RS MAT DETAIL

OUR SCRAPESGRATE ENTRANCE MATS HAVE SCRAPER BARS THAT ALTERNATE WITH AN ABSORBENT ULTRASORB TREAD FOR INDOOR USE OR HEAVY-DUTY RUGGED SCRUB FOR OUTDOOR USE. WATER AND DIRT ARE SCRAPED OFF AND FUNNELED UNDER THE MAT AT THE DOOR SO THE FLOOR STAYS CLEAN. THIS PRODUCT CARRIES A FIVE YEAR WARRANTY.


## **DETAIL NOTES:**


- 1-TREAD RAILS MUST RUN PERPENDICULAR TO TRAFFIC DIRECTION.
- 2-MAT DIMENSIONS ALLOW FOR CLEARANCE BETWEEN MAT SECTIONS AND FRAME IN THE WIDTH DIMENSION ONLY.
- 3-TRIM THE FILLER TO ENSURE A TIGHT FIT IN THE TRAFFIC DIMENSION

3

## SPECIFICATIONS:

SCRAPESGRATE MODEL M-675RS HAS OUR 600 DENIER TUFTED POLYPROPYLENE RUGGED SCRUB TREADS HAVE PRIMARY AND SECONDARY BACKING. RAILS ARE MADE WITH 6063-T52 ALLOY RAILS. THEN ALTERNATES WITH A RIGID HIGH-IMPACT ACRYLIC SCRAPER BARS. ARE 3/8" (9.5MM) DEEP AND, SPACED 1-5/16" (33.3MM) ON CENTER. FRAMES USED WITH THE M-675RS ARE: TYPE F-3 RECESSED; TYPE F-4 SURFACE MOUNT; TYPE F-6 THIN LINE; F-6R THIN LINE CAST IN PLACE FRAMES WHICH ARE MADE OF ALUMINUM. IN ADDITION OUR F-5 SURFACE FRAME IS AVAILABLE IN VINYL.

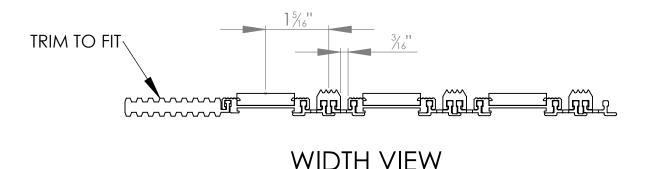

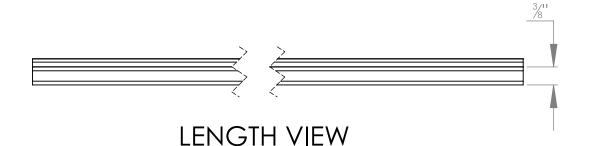

Arden
Architectural
Specialties, Inc.™

9300 73rd Avenue North
Brooklyn Park, MN 55428

JOB REF.

MODEL NO. M-675RS

RELEASED DATE 6/3/2010

SHEET 1 OF 1

OPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED

7 6 5 4

SHEET