




**PRODUCT INFORMATION**

RECOMMENDED SYSTEMS	SURFACE PREPARATION				
<p>1 ct. 19-100 Clear Skylight Coating.</p>	<p>Surface must be power washed (minimum 2,000 psi) to remove dirt, loose paint and rust, excessive chalk and other foreign matter which could prevent proper adhesion. Skylights with cracks and/or holes should be replaced.</p>				
	<p><b>APPLICATION CONDITIONS</b></p>				
	<p>Do not apply below 50° F or when rain is forecast. Applications during periods of low temperature or high humidity will extend dry time. Allow 4 - 6 hours for coating to dry prior to being subjected to rain or heavy dew. KEEP FROM FREEZING.</p> <p>Refer to product Application Bulletin for detailed application information.</p>				
	<p><b>PACKAGING</b></p>				
	<p>5 gallon pails (18.9 liters)</p>				
<p><b>KST019100</b></p>	<p><b>SAFETY PRECAUTIONS</b></p>				
<table border="1"> <thead> <tr> <th data-bbox="147 1514 462 1560">SMIS #</th> <th data-bbox="462 1514 777 1560">SIZE</th> </tr> </thead> <tbody> <tr> <td data-bbox="147 1560 462 1598">992-0984</td> <td data-bbox="462 1560 777 1598">5 gal. pail</td> </tr> </tbody> </table>	SMIS #	SIZE	992-0984	5 gal. pail	<p>Refer to the MSDS sheet before use.</p> <p>Published technical data and instructions are subject to change without notice. Contact your Uniflex<sup>®</sup> representative for additional technical data and instructions.</p>
SMIS #	SIZE				
992-0984	5 gal. pail				
<p><b>DISCLAIMER</b></p>	<p><b>WARRANTY</b></p>				
<p>The information and recommendations set forth in this Product Data Sheet are based upon tests conducted by or on behalf of KST Coatings – A Business Unit of The Sherwin-Williams Company. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your Uniflex<sup>®</sup> representative to obtain the most recent Product Data Information and Application Bulletin.</p>	<p>This product is manufactured of good materials and by competent workmen. Seller's and manufacturer's only obligation shall be to replace such quantity of product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising from the use or the inability to use the product for his/her intended use, and user assumes all risk and liability.</p> <p>Uniflex<sup>®</sup> is a U.S. registered trademark. The information on this data sheet is effective as of August 2007 and supersedes all previous information.</p>				

## APPLICATION BULLETIN

SURFACE PREPARATION	APPLICATION CONDITIONS
<p>Surface must be power washed (minimum 2,000 psi) to remove dirt, loose paint and rust, excessive chalk and other foreign matter which could prevent proper adhesion. Skylights with cracks and/or holes should be replaced.</p>	<p>Do not apply below 50° F or when rain is forecast. Applications during periods of low temperature or high humidity will extend dry time. Allow 4 - 6 hours for coating to dry prior to being subjected to rain or heavy dew. <b>KEEP FROM FREEZING.</b></p> <p>Refer to product Application Bulletin for detailed application information.</p>
	APPLICATION EQUIPMENT
	<p>Inspect preliminary work relating to substrate for problem areas to ensure all preparatory work has been properly completed.</p> <p>Apply with a soft brush (avoid excessive brushing), roller or airless spray. This product has excellent suspension and requires minimal stirring. May be applied over damp, not wet, surfaces. <b>DO NOT THIN.</b></p> <p>GHD-633 Tip Pressure: 2,800 psi</p>

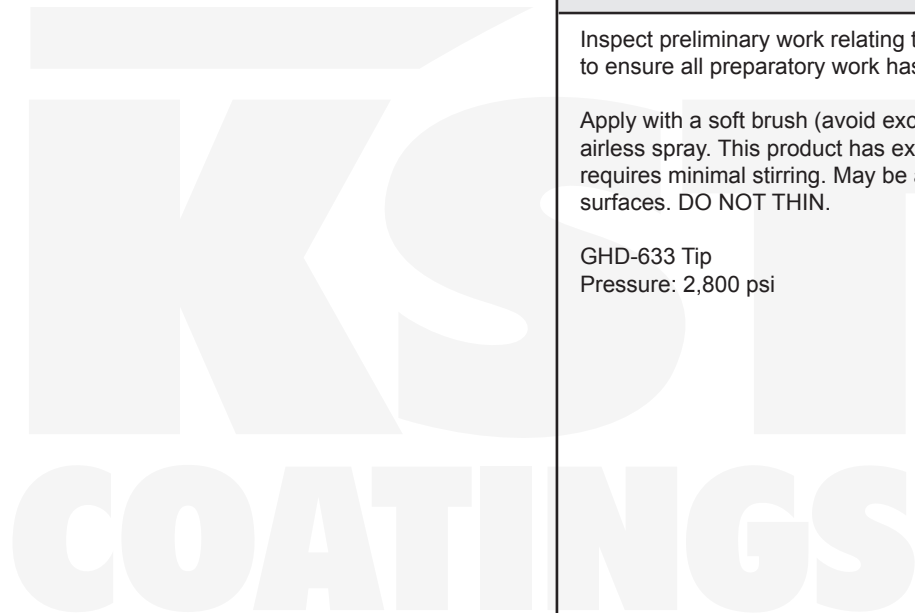

A Business Unit of The Sherwin-Williams Company

## APPLICATION BULLETIN

APPLICATION PROCEDURES	CLEAN-UP INSTRUCTIONS
<p>Surface Preparation must be completed as indicated.</p> <p><b>Mixing Instructions:</b> Minimal stirring required.</p> <p><b>Application Rate:</b> Apply with soft brush (avoid excessive brushing), roller or airless spray.</p> <p><b>Coverage:</b> 300 sq. ft./gallon</p> <p><b>Dry Time:</b> Sets to Touch: 1 hour Through Dry: 4 - 6 hours Drying time is temperature, humidity and film thickness dependent.</p> <p><b>Clean Up:</b> Warm, soapy water</p>	<p>Inspect completed application and correct any defects. Manufacturer's representatives may inspect the completed roofing system and notify the Contractor of any defects in the application. Clean up all debris, excess materials and equipment and remove from site. Restrict traffic to only essential personnel. Provide appropriate protection against traffic and construction activities on completed roofs.</p>
	PERFORMANCE TIPS
	<ul style="list-style-type: none"> <li>• Minimal stirring required.</li> <li>• It is recommended that the coating installation be checked on regular maintenance schedules. Small area touch-up can be made at any time following recommended application procedures.</li> <li>• Technical advice on use of material for specific application and end use requirements is available from the manufacturer. Material Safety Data Sheet (MSDS) should be consulted for further information. This product is for industrial and professional use only.</li> <li>• Any discharge of fumes or possible contaminants must be noted. Contact Uniflex<sup>®</sup> to determine if fumes or matter being exhausted will interfere with adhesion.</li> <li>• Note: Slope of roof area must not be less than ¼" per foot.</li> </ul>
	SAFETY PRECAUTION
	<p>Refer to the MSDS sheet before use.</p> <p>Published technical data and instructions are subject to change without notice. Contact your Uniflex<sup>®</sup> representative for additional technical data and instructions.</p>
	WARRANTY
	<p>This product is manufactured of good materials and by competent workmen. Seller's and manufacturer's only obligation shall be to replace such quantity of product proved to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising from the use or the inability to use the product for his/her intended use, and user assumes all risk and liability.</p>
DISCLAIMER	
<p>The information and recommendations set forth in this Product Data Sheet are based upon tests conducted by or on behalf of KST Coatings – A Business Unit of The Sherwin-Williams Company. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your Uniflex<sup>®</sup> representative to obtain the most recent Product Data Information and Application Bulletin.</p>	<p>Uniflex<sup>®</sup> is a U.S. registered trademark. The information on this data sheet is effective as of August 2007 and supersedes all previous information.</p>