



catalog of appliances

Now you can choose between a modern kitchen with true local flavor and a kitchen designed with the latest in cooking innovations.

That enchanting little spot with fantastic food and charming atmosphere becomes all your own with the new GE Café™ kitchen. With smooth stainless steel and innovative cooking conveniences, you can transform any kitchen into your very own corner café.

Experience the right combination of high style and performance with GE Profile™ appliances. Clean lines, bold curves and custom finishes make a dramatic statement, creating a beautiful kitchen you'll enjoy now and for many years to come. For more information on GE Café and GE Profile appliances, visit ge.com.



Profile™

Café™

GE Café™ and GE Profile™ refrigerators



CSS25USW
GE Café
25.4 cu. ft.
refrigerator



- ClimateKeeper™ system
- ExpressChill™ with one setting
- Integrated dispenser with LED lighting and UltraFlow₁₀₀
- Slide 'n Store™ full-extension freezer baskets
- Quick Ice™ setting
- TurboCool™ setting
- Integrated Ice™ system



PSS23MSW
GE Profile
23.1 cu. ft.
refrigerator



- ClimateKeeper system
- Integrated dispenser with LED lighting and UltraFlow₁₀₀
- ExpressChill with one setting
- Slide 'n Store full-extension freezer baskets
- Quick Ice setting
- TurboCool setting
- Integrated Ice system
- Tilt-out freezer door bins



PFCF1NJW
GE Profile
counter-depth
20.9 cu. ft.
French-door
refrigerator



- High-gloss contoured doors with top and bottom bevels
- External water dispenser with actual temperature readout and child lock
- Factory-installed icemaker with GE water filtration
- Freshness Center™ with 2 adj. humidity crispers and 1 full-width adj. temperature deli drawer
- BrightSpace™ interior with GE Reveal® lighting
- Multi-level Slide 'n Store freezer baskets
- In-the-door beverage rack and condiment bin
- QuickSpace shelf
- Self-closing drawer



PFSS5NFW
GE Profile
25.1 cu. ft.
French-door
refrigerator
with
icemaker



- Stainless steel contoured doors with top and bottom bevels
- Factory-installed icemaker with GE water filtration
- Freshness Center™ with 2 adj. humidity crispers and 1 full-width adj. temp deli drawer
- Multi-level Slide 'n Store freezer baskets
- In-the-door beverage rack and condiment bin
- QuickSpace™ shelf
- Upfront temperature controls with actual temperature display and TurboCool setting
- Self-closing drawer
- Adjustable spillproof glass shelves

GE Café and GE Profile side-by-side refrigerators

	GE Café	GE Profile
	CSS25USW	PSS23MSW PSF23MGW
Stainless steel model	●	●/—
ENERGY STAR®	●	●
Capacity		
Total (cu. ft.)	25.4	23.1
Fresh food (cu. ft.)	15.90	15.86
Freezer (cu. ft.)	9.5	7.26
Shelf area (sq. ft.)	22.70	20.1
Fresh food features		
ClimateKeeper system	●	●
Multi-flow air system	●	●
Electronic sensors	●	●
Actual temperature display	●	●
External controls	●	●
TurboCool™ setting	●	●
GE water filtration system	1-year	1-year
UltraFlow™ dispenser	Crushed ice, cubes, water	Crushed ice, cubes, water
Light	●	●
Child lock and door alarm	●	●
Quick Ice feature	●	●
Water filter indicator light	●	●
Cabinet shelves	3 glass	3 glass
Adjustable	3	3
Slide-out, spillproof	3	2
QuickSpace shelf	●	●
Integrated shelf support system	●	●
Snugger™ clips	2	2
Freshness Center	●	●
Top drawer	Adj. temp.	Adj. temp.
Middle drawer	Adj. humidity	Adj. humidity
Bottom drawer	ExpressChill	ExpressChill
ClearLook™ door bins	3	4 (3 adj.)
In-the-door beverage rack	●	●
BrightSpace™ interior	GE Reveal®	GE Reveal
Quiet design	Deluxe	Premium
AutoEnergy saver	●	●
Freezer features		
FrostGuard™ technology	●	●
Integrated Ice system	●	●
Wire slide-out baskets	3 (2 full-extension)	3 (2 full-extension)
Wire cabinet shelves	3	2
Wire tilt-out door bin(s)	2 adj.	3 (2 adj.)
Door bin/shelf	1 bin	1 shelf
BrightSpace interior light	GE Reveal®	GE Reveal
Exterior		
Color(s) available*	SS	WW, CC, BB
Door handle(s)	GE Café stainless	Color-matched sculptured
Exterior design	Contoured doors	High-gloss contoured doors
Textured steel	Top only	Case only
Stainless steel side panels	●	
Adjustable rollers	Front	Front
Weights & Dimensions		
Height to top of hinge (in.) A	69-3/8	69-1/4
Height to top of case (in.) B	68-7/8	68-3/4
Case depth without door (in.) C †	28-3/4	28
Case depth less door handle (in.) D †	32-1/4	32-1/4
Case depth with door handle (in.) E †	34-3/4	34-11/16
Depth w/fresh food door open 90° (in.) F †	50-3/4	50-1/16
Width (in.) G	35-3/4	32-3/4
Width w/door open 90° w/door handle (in.) H	41-1/2	40-3/4
Air clearances	Each side (in.)	1/8
	Top (in.)	1
	Back (in.)	1
Approximate shipping wt. (lbs.)	450	314
Power/Rating	120V, 60Hz, 15Amps	

*Color(s) available: SS = Stainless steel, WW = White, CC = Bisque, BB = Black.
†Water hook-up fits in back air clearance when calculating installation depth.
If installed against a wall, allow clearance of 14-3/16" on 25 cu. ft. models on freezer side to remove ice bin. To remove fresh food pans, remove door bins. Clearances required to remove fresh food full-size pan without disassembling: 18-15/16" on 25 cu. ft. Allow additional space for any necessary leveling adjustments.

ALL MODELS AVAILABLE IN U.S. AND CANADA.
Energy information available at www.ge.com

French-door refrigerators

	GE Profile	
	PFC51NJW PFCF1NJW	PFS55NFW PFSF5NFW
ENERGY STAR	●	●
Stainless steel model	●/—	●/—
French-door model	●	●
Capacity		
Total (cu. ft.)	20.9	25.1
Fresh food (cu. ft.)	14.5	17.4
Freezer (cu. ft.)	6.3	7.7
Shelf area (sq. ft.)	23.9	30.4
Fresh food features		
External controls with actual temperature display and child lock	●	
Internal electronic temperature controls		●
TurboCool setting	●	●
Cabinet shelves	4 glass	4 glass
Adjustable	4 split	4 split
Slide-out	3	3
Spillproof	3	3
QuickSpace shelf	1	1
GE water filtration	1-year	1-year
Water filter indicator light	●	●
Freshness Center	●	●
Crisper drawers	2 adj. humidity	2 adj. humidity
Full-width deli drawer	1 adj. temp	1 adj. temp
ClearLook adjustable gallon door bins	4	4
Fixed door bins	1	1
Beverage rack	In-the-door	In-the-door
Snugger clips	2	2
BrightSpace interior lighting	GE Reveal	GE Reveal
Quiet design	●	●
NeverClean™ condenser	●	●
Freezer features		
Factory-installed icemaker & bin	●	Opt. (IIM4A)
FrostGuard technology	●	●
Multi-level Slide 'n Store full extension freezer baskets	2 f/w, 1 split	2 f/w, 1 split
BrightSpace interior	GE Reveal	GE Reveal
Exterior		
Color(s) available*	SS WW/CC/BB	SS WW/BB
	Stainless steel High gloss color-matched	Stainless steel High gloss color-matched
Sculptured door handles		
Exterior design	Contoured doors	Contoured doors
Textured steel case	Black Color-matched	Black Color-matched
Door	Stainless High-gloss	Stainless High-gloss
Door stops	●	●
Adjustable rollers	Front and rear	Front
Weights & Dimensions		
Height to top of hinge (in.) A	69-5/8	69-5/8
Height to top of case (in.) B	69	69
Case depth without door (in.) C †	24-1/8	28-1/2
Case depth less door handle (in.) D †	28-1/2	32-1/2
Case depth with door handle (in.) E †	31-3/8	35-1/16
Depth w/fresh food door open 90° (in.) F †	43-1/8	47-1/2
Width (in.) G	35-7/8	35-7/8
Width w/door open 90° w/door handle (in.) H	42-1/2	42-1/2
Air clearances	Each side (in.)	1/8
	Top (in.)	1
	Back (in.)	1
Approximate shipping wt. (lbs.)	363	388
Power/Rating	120V, 60Hz, 15Amps	

*Color(s) available: SS = Stainless steel, WW = White, CC = Bisque, BB = Black.
†Water hook-up fits in back air clearance when calculating installation depth.

ALL MODELS AVAILABLE IN U.S. AND CANADA.
Energy information available at www.ge.com

GE Profile™ built-in ovens



PT960

GE Profile 30" double oven

- Glass touch LCD controls
- PreciseAir™ convection system (upper and lower)
- Flat back convection
- Convection bake/roast
- Hidden bake oven interior
- Dual interior lighting
- Self-clean, heavy-duty oven racks



PT956

GE Profile 30" double oven

- Glass touch controls
- PreciseAir convection system (upper oven only)
- Convection bake/roast (upper oven only)
- Hidden bake oven interior
- Self-clean, heavy-duty oven racks



PT920

GE Profile 30" single oven

- Glass touch LCD controls
- PreciseAir convection system
- Flat back convection
- Convection bake/roast
- Hidden bake oven interior
- Self-clean oven



PT916

GE Profile 30" single oven

- Glass touch controls
- PreciseAir convection system
- Flat back convection
- Convection bake/roast
- Hidden bake oven interior
- Self-clean, heavy-duty oven racks

30" built-in double ovens

GE Profile			
Convection double ovens			
		PT960SM PT960WM PT960BM	PT956SM PT956WM PT956CM PT956BM
Features			
Oven	Upper Lower	Convection/self-clean Convection/self-clean	Convection/self-clean Thermal/self-clean
Cleaning time		Variable	Variable
Automatic self-clean oven door lock		●	●
Self-clean oven w/Delay Clean option		●	●
Light self-clean option		●	●
TrueTemp™ system		●	●
Hidden bake oven interior		●	●
Variable broil/Six-pass broil element		●	●
Eight-pass bake element		●	●
PreciseAir convection system		●	Upper
Convection bake		Multi/single-rack	Multi/single-rack
Convection roast		●	Upper
Auto Recipe™ conversion		Upper	Upper
SmartSet controls		LCD-Glass touch	Glass touch
Proof mode		●	Upper
Oven meat probe		●	Upper
Warm mode		●	Upper
Temperature display		●	●
Delay bake option		●	●
C° and F° programmable		●	●
Audible preheat signal		●	●
Auto oven shut-off w/override		●	●
Electronic clock and kitchen timer		●	●
Control lock capability		●	●
Oven light		2	2
Certified Sabbath mode		●	●
Flat convection cover		●	●
QuietBake™ fan system		●	●
Oven racks	Upper Lower	3 heavy-duty 3 heavy-duty	3 heavy-duty 2 heavy-duty
Self-clean oven racks		●	●
Embossed rack positions		7 upper/7 lower	7 upper/7 lower
Appearance			
Color appearance*		SS WW CC BB	SS WW CC BB
Frameless oven doors		Stainless steel White glass Black glass	Stainless steel White glass Bisque glass Black glass
Big ClearView™ windows		●	●
Oven door handles		Sculptured Stainless steel Sculptured white Sculptured black	Sculptured Stainless steel Sculptured white Sculptured bisque Sculptured black
Weights & Dimensions			
Approx. shipping wt. (lbs.)		257	256
Oven cabinet width required (in.)		30	30
Overall dimensions (WxHxD in inches)		29-3/4 x 52-7/8 x 23-1/2	29-3/4 x 52-7/8 x 23-1/2
Overall oven interior dimensions (WxHxD in inches)	Upper Lower	24 x 17-1/2 x 18-1/4 24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4 24 x 17-1/2 x 18-1/4
Power/Ratings			
KW rating @	240V 208V	9.0 6.8	9.0 6.8
Amps @	240V 208V	40 40	40 40
Convection wattage		2500	2500
Broiler/bake wattage		2400/2100	2400/2100

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.



Listed by
Underwriters
Laboratories

30" built-in single ovens

GE Profile			
Convection single ovens			
		PT920SM PT920WM PT920BM	PT916SM PT916WM PT916CM PT916BM
ADA-compliant			
●			
Features			
Oven		Convection/ self-clean	Convection/ self-clean
Cleaning time		Variable	Variable
Automatic self-clean oven door lock		●	●
Self-clean oven with Delay Clean option		●	●
Light self-clean option		●	●
TrueTemp system		●	●
Hidden bake oven interior		●	●
Variable broil/Six-pass broil element		●	●
Eight-pass bake element		●	●
PreciseAir convection system		●	●
Convection bake		Multi/single-rack	Multi/single-rack
Convection roast		●	●
Auto Recipe conversion		●	●
SmartSet controls		LCD-Glass touch	Glass touch
Proof mode		●	●
Warm mode		●	●
Oven meat probe		●	●
Temperature display		●	●
Delay bake option		●	●
C° and F° programmable		●	●
Audible preheat signal		●	●
Auto oven shut-off w/override		●	●
Electronic clock and kitchen timer		●	●
Control lock capability		●	●
Oven light		2	2
Certified Sabbath mode		●	●
Flat convection cover		●	●
QuietBake fan system		●	●
Oven racks		3 heavy-duty self-clean	3 heavy-duty self-clean
Embossed rack positions		7	7
Appearance			
Color appearance*		SS WW BB	SS WW CC BB
Frameless oven door		Stainless steel White glass Black glass	Stainless steel White glass Bisque glass Black glass
Big ClearView window		●	●
Oven door handle		Sculptured stainless steel Sculptured white Sculptured black	Sculptured stainless steel Sculptured white Sculptured bisque Sculptured black
Undercounter installation		●	●
Weights & Dimensions			
Approx. shipping wt. (lbs.)		140	140
Oven cabinet width required (in.)		30	30
Overall dimensions (WxHxD in inches)		29-3/4 x 28-1/4 x 23-1/2	29-3/4 x 28-1/4 x 23-1/2
Overall oven interior dimensions (WxHxD in inches)		24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4
Power/Ratings			
KW rating @	240V 208V	4.5 3.4	4.5 3.4
Amps @	240V 208V	20 20	20 20
Convection wattage		2500	2500
Broiler/bake wattage		2400/2100	2400/2100

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

GE Café™ and GE Profile™ free-standing ranges



PB970 GE Profile 30" free-standing electric double oven range

- Upper oven
- 6.5 cu. ft. total oven capacity
- Self-clean ovens
- 9"/12" dual element
- Warming zone
- Self-clean, heavy-duty oven racks
- TrueTemp™ system
- Slow cook and pizza modes



PGB908 GE Profile 30" gas range

- Self-clean oven
- Extra-large, 5.0 cu. ft. oven capacity
- Deep-recessed cooktop
- PowerBoil™ 17,000 BTU burner
- Precise Simmer burner
- Heavy cast grates
- QuickSet V oven controls
- Two oven racks
- Stainless appearance knobs on stainless steel model



JB900 GE Profile 30" CleanDesign™ range

- Self-clean oven
- Super-large, 5.3 cu. ft. oven capacity
- TrueTemp system
- Warming drawer
- 9"/12" and 6"/9" dual elements
- Warming zone
- Self-clean heavy-duty oven racks



CGS980 GE Café 30" gas range

- PreciseAir™ convection system
- Extra-large, self-clean oven
- Deep-recessed stainless steel cooktop
- 18,000 BTU dual-flame stacked burner
- Center oval burner
- Non-stick griddle
- Lower oven – bake, warm, store
- Gas cooktop and oven lock-out
- Optional backguard kit (JXS80) available at additional cost

30" free-standing CleanDesign™ electric ranges

Features	GE Profile		
	PB970SM PB970TM PB970BM	JB900SK JB900TK JB900KK JB900BK	
Self-clean oven	●	●	
Self-clean latch	Auto	Auto	
Oven capacity (cu. ft.) (upper/lower)	2.2 /4.4	5.3	
Hidden bake oven interior	Lower		
Self-clean oven racks	3 heavy-duty	2 heavy-duty	
	Black True white Black	Black True white True bisque Black	
Ceramic-glass cooktop	●	●	
One-piece upswept cooktop	●	●	
9"/12" dual element	1 (3000W)	1 (3000W)	
6"/9" dual element	1 (2500W)	1 (2500W)	
6" element	2 (1500W)	2 (1500W)	
6" warming zone	1 (120W)	1 (120W)	
Infinite heat controls	●	●	
TrueTemp™ system	●	●	
Six-pass power bake element	●	●	
QuickSet oven controls		QuickSet V	
Chef Assist controls	●		
Proof mode/Warm mode	Warm only	- / ●	
Pizza mode	●		
Slow cook mode	●		
Digital temperature display	●	●	
Oven function icons	●	●	
Delay bake	●	●	
Oven light pad	●	●	
Control lock capability	Oven		
Self-clean cool-down time display	●	●	
Light self-clean option	●	●	
Delay clean option	●	●	
Auto oven shut-off	w/override	w/override	
Certified Sabbath mode	●	●	
Audible preheat signal	●	●	
Dual element bake	●	●	
Hot surface lights	Cooktop	Cooktop	
Oven "ON" light	●	●	
Self-clean cycle light	●	●	
Interior oven light	Auto/pad	Auto/pad	
Upper oven	●		
Warming drawer (140° to 220°)		●	
Removable liner		●	
Storage drawer		●	
Appearance			
Color appearance*	SS/WW/BB	SS/WW/ CC/BB	
	Stainless steel White Black	Stainless steel White Bisque Black	
Frameless glass oven door			
Oven door with window	Big ClearView™	Big ClearView	
Heavy-duty knobs	SS model		
Designer-style handle	Sculptured	Sculptured	
Weights & Dimensions			
Overall oven interior dimensions (WxHxD in inches) upper/lower	24 x 8-3/4 x 17-7/8 24 x 17-1/2 x 18-1/4	24-1/8 x 19-1/2 x 19-3/8	
Approx. shipping wt. (lbs.)	247	211	
Power/Ratings			
KW rating @	240V 208V	14.2 10.6	13.5 10.1
Amp rating @	240V / 208V	40	40

*SS = Stainless steel with black accents, BS = CleanSteel with black accents,
WW = White with white glass door, CC = Bisque with bisque glass door,
BB = Black with black glass door.
All ranges are shipped with cooktop cleaning creme & pad.

30" self-clean gas ranges

Features	GE Profile	GE Café
	Sealed burner PGB908SEM PGB908DEM	Gas CGS980
ADA-compliant		●
Features		
Self-clean oven with Delay Clean option	●	●
Light self-clean option		●
Variable cleaning time	●	●
Automatic self-clean oven door lock		●
Oven racks	2	3 heavy-duty self-clean
TrueTemp system	●	●
Cooktop	Porcelain	Stainless Steel
Deep-recessed cooktop	●	●
PowerBoil™ burner	(1) 17,000 BTU/ 160° simmer	(1) 17,000 BTU/ 160° simmer
Dual-flame stacked burner		(1) 18,000 BTU/ 140° simmer
Precise Simmer burner	(1) 5,000 BTU/ 140° simmer	(1) 6,000 BTU/ 140° simmer
High-output burner (Nat.)	(1) 11,000 BTU/ 150° simmer	
All-purpose burners	(1) 9,100 BTU/ 150° simmer	(1) 9,100 BTU/ 150° simmer
Center oval burner	6,000 BTU	6,000 BTU
Non-stick griddle	included	included
Continuous grates	Dishwasher-safe	Self-clean
Ignition system	Electronic	Electronic
PreciseAir™ convection system		●
Convection bake		Single-/multi-rack
Convection roast		
Auto Recipe™ conversion		●
Electronic controls	QuickSet V	QuickSet VI Glass touch
Oven Meat probe		●
Closed door broiling	●	●
Temperature display	●	●
Delay Bake option	●	●
C° or F° programmable		●
Audible preheat signal	●	●
Auto oven shut-off	●	w/override
Gas cooktop and oven lock-out	●	
Electronic clock/kitchen timer		●
Certified Sabbath mode	●	●
Interior oven light	●	●
Warming drawer (140°-220°)	●	
Lower oven (140°-450°)		●
Appearance		
Color appearance*	SS/WW/CC/BB	SS
	Stainless steel White glass Bisque glass Black glass	Stainless steel
Frameless oven door		
Oven door with window	Big ClearView	Big ClearView
Oven door handle	Professional-style	Sculptured
Heavy-duty knobs		●
Dishwasher-safe knobs	●	●
Lower oven/Storage drawer handle	Sculptured	Commercial
Weights & Dimensions		
Overall oven interior dimensions (WxHxD in inches)	← 24 x 19 x 19 →	
Approx. shipping wt. (lbs.)	235	245
Power/Ratings		
	(1) 17.0/11.0 (1) 6.0/6.0 (1) 11.0/9.1 (1) 5.0/4.0 (1) 9.1/8.0	(1) 17.0/11.0 (1) 18.0/15.0 (1) 5.0/4.0 (1) 9.1/8.0 (1) 6.0/6.0
Top burners (000's BTUs) Nat/LP		
Range electrical rating	240v/208v, 60Hz/9A	120v, 60Hz, 15A
Convection wattage		1,200
Broiler/Bake wattage/BTU	16,000/13,500 watts	13,500/2,585 watts
LP conversion kit (included)	●	●

*SS = Stainless steel Factory set for Natural Gas. A set of LP orifices is included with each range for LP conversion.

GE Profile™ built-in cooktops



PP975

GE Profile 36" electronic touch control cooktop

- Electronic touch controls
- Control lock capability
- Ribbon heating elements
- 12"/9"/6" tri-ring element
- 5"/8" PowerBoil™ element
- 5"/8" dual element
- Warming zone
- Full stainless steel frame on stainless steel model
- Upfront controls



PP950

GE Profile 30" electric touch control cooktop

- Electronic touch controls
- Precise Digital Control System™
- Control lock capability
- Pan presence sensor
- Pan size sensor
- Kitchen timer
- 6"/9" and 5"/8" dual elements



JGP989

GE Profile 30" gas downdraft cooktop

- Downdraft exhaust
- Gas-on-glass cooktop
- Sealed cooktop burners
- Continuous grates
- Dishwasher safe grates
- Deluxe cast grates



JGP970

GE Profile 36" gas-on-glass cooktop

- Gas-on-glass cooktop
- Sealed cooktop burners
- PowerBoil 15,000 burner
- Precise Simmer burner
- Continuous grates
- Dishwasher-safe grates and knobs
- Control lock capability
- Heavy-duty knobs on stainless model

Built-in electronic touch control cooktops

	GE Profile		
	PP975SM PP975WM PP975BM	PP950SM PP950WM PP950BM	
ADA-compliant	●		
Features			
Ceramic-glass surface	Pattern_black True white Pattern_black	Pattern_black Pattern_white Pattern_black	
Number of elements	5 ribbon	4 ribbon	
12"/9"/6" tri-ring element	1 ribbon (3000W)		
6"/9" dual heating element		1 ribbon (2500W)	
5"/8" dual heating element	1 ribbon (2200W/ 1 PowerBoil (2400W)	1 ribbon (2200W)	
7" heating elements		1 ribbon (1500W)	
6" heating elements	1 ribbon (1200W)	1 ribbon (1200W) w/warmer	
6" warming zone	1 ribbon (120W)		
Hot surface indicator lights	5	4	
Precise Digital Control System		●	
Pan presence sensor		●	
Pan size sensor		●	
Kitchen timer		●	
Control lock capability	●	●	
Appearance			
	SS WW BB	SS WW BB	
Color appearance*	WW/BB	WW/BB	
Frameless	WW/BB	WW/BB	
Stainless steel frame	SS models only	SS models only	
Weight & Dimensions			
Cooktop width (in inches)	36	30	
Approx. shipping wt. (lbs.)	44	38	
Power/Ratings			
KW rating @	240V 208V	8.9 6.7	7.4 5.6
Amps @	240V 208V	40 40	40 30

*SS = Stainless Steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

Built-in gas-on-glass cooktops

	GE Profile	
	JGP970SEK JGP970TEK JGP970KEK JGP970BEK	
ADA-compliant	●	
Features		
Cooktop burners	5 sealed (1) 15.0 180° simmer (1) 11.0 (1) 9.1	
PowerBoil burner 000's BTUs	150° simmer (2) 6.0	
All-purpose burner(s) 000's BTUs	140° simmer	
Precise Simmer burner(s) 000's BTUs	●	
Electronic pilotless ignition	●	
Cooktop surface	Ceramic-glass Matte black deluxe-cast Grey deluxe-cast Taupe deluxe-cast Black deluxe-cast	
Cooktop grates	●	
Continuous grates	●	
Dishwasher-safe grates and knobs	●	
	Black True white True bisque	
Control panel	Black	
Controls	Upfront	
Control lock capability	●	
Appearance		
	SS WW CC BB	
Color appearance*	SS models only	
Heavy-duty knobs	SS models only	
Weights & Dimensions		
Cooktop width (in inches)	36	
Approx. shipping wt. (lbs.)	59	
Features		
Gas cooktop electrical rating	120V, 60Hz, 5A (1) 15.0/13.0 (1) 11.0/9.1 (1) 9.1/8.1 (2) 6.0/6.0	

Burners (000's/BTUs): Natural Gas/LP Gas †

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

†A set of LP orifices is included with each cooktop for LP conversion. Factory set for natural gas.

Built-in gas downdraft cooktops

	GE Profile		
	JGP989TK	JGP989KK	JGP989BK
Features			
Cooktop burners	Sealed	Sealed	Sealed
Electronic pilotless ignition	●	●	●
Ceramic-glass surface	True white	True bisque	Black
Burner grates	2	2	2
Downdraft exhaust (CFM)	400	400	400
Appearance			
Color appearance*	WW	CC	BB
Frameless	●	●	●
Weights & Dimensions			
Cooktop width (in inches)	30	30	30
Overall dimensions (WxD in inches)	← 29-7/8 x 21-7/8 →		
Approx. shipping weight (lbs.)	90	90	90
Power/Ratings			
Gas cooktop electrical rating	120V	120V	120V
Burners (000's/BTU's)**	(2) 9.1/8.5 (1) 11.5/11.0	(2) 9.1/8.5 (1) 11.5/11.0	(2) 9.1/8.5 (1) 11.5/11.0
Natural Gas/LP Gas	(1) 5.5/5.5	(1) 5.5/5.5	(1) 5.5/5.5

*WW = White on white, CC = Bisque on bisque, BB = Black on black.

**A set of LP orifices is included with each cooktop for LP conversion. Factory set for natural gas.

GE Profile™ ventilation products



JV966

GE Profile 36" designer hood

- 600 CFM
- Four-speed fan control
- Vertical exhaust
- Halogen cooktop light
- Nightlight
- Removable grease filter
- Optional chimney cover available at additional cost

36" designer hood

GE Profile	
JV966D	
General	
Width	36"
Height	18"
Features	
Ducting	Vertical only
Duct size	7" round
CFM rating	600
Sones rating	7
Filters	●
Filter cleaning	Dishwasher-safe
Lighting	Dual halogen
Control type	Manual
Control location	Hidden
Four-speed fan control	●
Light settings	Off/High/Night
Blower/light switch color	Black
Appearance	
Color appearance*	SS
Weights & Dimensions	
Approx. shipping weight (lbs.)	77
Power/Ratings	
Current rating Amps @ 120V	3.9
Accessories/Kits	
Baffle filter kit	●
Optional chimney kit	●

*SS = Stainless steel.



JV695/694

GE Profile 36" slide-out hood

- 300 CFM
- Variable speed fan control
- Vertical exhaust
- Cooktop light
- Removable grease filter
- Rectangular damper included

Slide-out hoods

GE Profile	
JV695S JV694S	
Features	
Variable-speed fan control	●
Auto heat sensor	●
Vertical exhaust (CFM)	300
Sones rating; top exhaust	4.5
Removable grease filter*	●
Filter size (sq. in.)	147
Cooktop light	●
3-1/4" x 10" rectangular duct	●
Appearance	
Color appearance**	WW BB
Weights & Dimensions	
Width (in inches)	36
Approx. shipping wt. (lbs.)	43
Power/Ratings	
Current rating amps @ 120V	3.7

*Has washable one-piece smoke/grease filter.

**WW = White on white, BB = Black on black.

Note: These vented hoods include an installed damper.

Note: The unit is ducted vertically. Horizontal ducting can be accomplished as shown.

Note: Remove glass visor from unit before installing hood in cabinet to protect visor from damage.



JV636/635

GE Profile 30" high-performance hood

- Vented
- Vertical or rear exhaust
- Four speed fan control
- Halogen light
- Removable grease filter
- Round and rectangular ducting

High-performance hoods

GE Profile	
JV636H JV635H	
Features	
Four-speed fan control	●
Damper included (rectangular)	●
Optional damper accessory (round)	JXDA22
CFM/Sones rating:	
Back rectangular	390/7.5
Top round	410/7.0
Top rectangular	380/7.5
Removable grease filters	2†
Cooktop light(s)	2 halogen (50-watt)
Night light position on light switch	●
3-1/4" x 10" rectangular duct	●
7" round duct	●
Appearance	
Color appearance*	SS WW/BB
Weights & Dimensions	
Approx. shipping wt. (lbs.)	30
Power/Ratings	
Current rating amps @ 120V	2.5

*SS = Stainless steel, WW = White on white, BB = Black on black.

†WB02X11011 (30") or WB02X11012 (36") removable grease filter is available for additional cost.



SCB2001

GE Profile Advantium 240 wall oven

- Speedcook technology—up to 8 times faster than a conventional oven
- Speedcook oven
- Sensor microwave oven
- 100 preprogrammed recipes
- Auto and Time Defrost
- Halogen interior lighting
- Grill tray



SCA1001

GE Profile Advantium 120 above-the-cooktop oven

- Speedcook technology—up to 4 times faster than a conventional oven
- Speedcook oven
- Traditional oven
- Sensor microwave oven
- Warming oven
- Over 100 preprogrammed recipes
- Auto and Time Defrost

Advantium wall ovens

	GE Profile SCB2001KSS SCB2000FWW SCB2000FCC SCB2000FBB
Features	
Family-size oven	●
Stainless steel oven interior	●
Cooking modes	
Speedcook	up to 8 times
Microwave oven	●
Oven controls	
Controls	Dial & membrane
Electronic scrolling display	●
Preprogrammed menu items	over 100
Help pad	●
Demo mode	●
Interior oven light	●
Beeper sound level control	4 levels
Variable scroll speed	5 speeds
Cooking complete reminder	●
Child lockout	●
Frameless glass oven door with window	-/●/●/●
Microwave oven features	●
Sensor	●
Defrost - Auto/Time	●
Microwave power output watts*	950
Appearance	
Color appearance	Stainless steel/White/Bisque/Black
New Profile sculptured handle	●
Weights & Dimensions	
Overall oven interior dimensions (in inches)	
Height	8-13/32
Width	18-29/32
Depth	13-19/32
Overall dimensions (in inches)	
Exterior width (W)	29-25/32
Exterior height (H)	21-7/8
Exterior depth, not including handle (D)	15-1/4
Oven cabinet width required (in inches)	
Cutout height	30
Cutout width	21
Cutout depth	28-1/2
Approx. shipping weight (lbs.)	19
Power/Ratings	
Input volt/hertz	115
Input amps/watts (max)	240V/208V 60Hz 30A/6.3KW-total
Accessories	
Cookbook	●
Cooking guide	●
Grill tray	●
Cooking tray	●
Microwave tray	●
Warranty	
Limited one-year in-home warranty**	●
Limited five-year magnetron warranty**	●

*See written warranty for details.
**IEC-test procedure 60705.

Advantium above-the-cooktop ovens

	GE Profile SCA1001KSS SCA1000HWW SCA1000HCC SCA1000HBB
Features	
Family-size oven	●
Stainless steel oven interior	●
Cooking modes	
Speedcook	up to 4 times
Traditional oven	●
Microwave oven	●
Warming	●
Oven controls	
Controls	Dial & buttons
Electronic scrolling display	●
Preprogrammed menu items	over 100
Help pad	●
Demo mode	●
Interior oven light	●
Beeper sound level control	4 levels
Variable scroll speed	5 speeds
Cooking complete reminder	●
Child lockout	●
High capacity cooktop vent fan	2 speed
Full-view cooktop lighting	●
Programmable night light	●
Microwave oven features	
Sensor	●
Defrost	●
Microwave power output watts	900
Appearance	
Color appearance	Stainless steel/White/Bisque/Black
New Profile sculptured handle	●
Weights & Dimensions	
Overall oven interior dimensions (in inches)	
Height	8-7/32
Width	21-3/32
Depth	14-3/32
Overall dimensions (in inches)	
Exterior height (front)	16
Exterior height (rear)	16-13/32
Exterior width	29-7/8
Exterior depth (not including handle)	15-3/8
Approx. shipping weight (lbs.)	95
Power/Ratings	
Input volt/hertz	120V/60Hz
Input amps/watts (max)	15A/1.7KW-total
Accessories	
Cookbook	●
Cooking guide	●
Cooking tray	●
Microwave tray	●
Warranty	
Limited one-year in-home warranty*	●
Limited five-year magnetron warranty*	●

*See written warranty for details.

GE Profile™ and GE Café™ microwave ovens



JVM3670

GE Profile Spacemaker® 36" sensor oven

- 36" width application
- 1.8 cu. ft. capacity, 1100 Watts*
- CircuWave™ 1100 cooking system
- Sensor cooking controls
- 1-lb. Quick Defrost
- Active Hidden vent
- 14-1/4" recessed turntable with On/Off
- Four-speed,† 300-CFM vortex venting system with boost



PVM1870/ PNM1871

GE Profile Spacemaker 1.8 cu. ft. sensor oven

- 1.8 cu. ft. capacity, 1100 Watts*
- CircuWave 1100 cooking system
- Sensor cooking controls
- Melt and 1-lb. Quick Defrost features
- Full-width active hidden vent
- 14-1/4" recessed turntable with On/Off
- Four-speed,† 300-CFM vortex venting system with boost
- Two removable oven racks



Model shown with optional trim kit JX2030SMSS

PEB2060

GE Profile 2.0 cu. ft. sensor oven

- 2.0 cu. ft. capacity, 1200 Watts*
- Sensor cooking controls
- Optional trim kit**
- Auto and Time Defrost
- 16" turntable
- Instant On controls
- Child lockout



CVM2072

GE Café 2.0 cu. ft. sensor oven

- 2.0 cu. ft. capacity, 1100 Watts*
- Dual-distribution cooking system
- EasyGuide™ menu system
- Softer, Melt and 1-lb. Quick Defrost features
- Full-width active hidden vent
- 14-1/4" recessed turntable with On/Off
- Four-speed 315-CFM venting system with boost
- Two removable oven racks



*IEC-60705 test procedure.

**Optional trim kits available in 27" and 30" configurations at an additional cost.

†Includes boost


GE Profile Spacemaker microwave ovens

	GE Profile	
	JVM3670SK JVM3670WF JVM3670CF JVM3670BF	PVM1870SM PNM1871SM PVM1870DM
Capacity		
Oven cavity (cu. ft.)	1.8	1.8
Features		
Watts (IEC-60705 test procedure)	1100	1100
Electronic touch controls	●	●
Scrolling display	2-line	2-line
Clock and AM/PM pad	●	●
Variable scroll speed	●	●
Help pad	●	●
Bilingual display (English/Spanish)	●	●
Sensor controls	Beverage ● ● Chicken/Fish ● ● Popcorn ● ● Potatoes ● ● Reheat ● ● Vegetables ● ●	
Custom pads	●	●
Express Cook (1-6 min.)	●	●
Instant On controls	●	●
Time cook	I & II	I & II
Add 30 seconds	●	●
Auto/Time/1 lb. Quick Defrost	●/●/●	●/●/●
Melt	●	●
Power levels	10	10
Delay Start	●	●
CircuWave 1100 cooking system	●	●
Recessed turntable	●	●
Turntable On/Off	●	●
Halogen interior/cooktop lighting	●	●
Programmable night light	●	●
Timer On/Off	●	●
Cooking complete reminder	●	●
Child lockout	●	●
300-CFM exhaust fan/Boost	4-speed / ●	4-speed / ●
Appearance		
Color appearance**	SS/WW/CC/BB	SS SS WW, CC, BB
Case color	Black/White/ Bisque/Black	Black Black White/Bisque/Black
Sculptured handle	●	●
Big view window	●	●
Weights & Dimensions		
36"-width application	●	●
Overall oven interior dimensions WxHxD (in inches)	21-29/32 x 9-1/2 x 14-19/32	21-29/32 x 9-1/2 x 14-19/32
Approx. shipping weight (lbs.)	80	68
Power/Ratings		
Input Volt/Hz	120V/60Hz	120V/60Hz
Input Amps/Watts (max)	15A/1.58KW	15A/1.58KW
Accessories		
Cooking guide label	●	●
Oven rack(s)	1 (2 positions)	2 (2 positions)
Recirculating charcoal filter kit (opt.)	JX81B	JX52BL JX52BL
Filler panel kit (optional for 36" installation)	—	JX52WH/—/JX52BL
Warranty		
Limited one-year in-home warranty†	●	●
Limited five-year magnetron warranty	●	●

*Non-vented model.
**SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.
†See warranty for details.

Overall exterior dimensions (in inches)

Model	W	D	H	H (Rear)
JVM3670	35-7/8	15-1/4	16	16-13/32
PVM1870/PNM1871	29-7/8	15-1/4	16	16-13/32

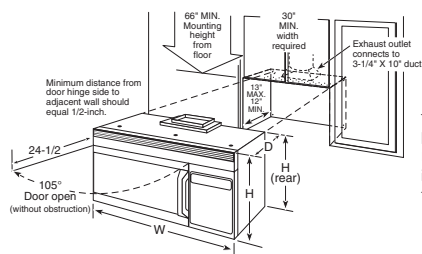

This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

GE Profile microwave ovens

	GE Profile	
	Extra-large	
	PEB2060SM PEB2060DM	
	ADA compliant	●
Capacity		
Oven cavity (cu. ft.)	2.0	
Features		
Watts (IEC-60705 test procedure)	1200	
Electronic touch controls	●	
Scrolling display with Help Pad	●	
Demo mode	●	
Electronic digital display w/clock	●	
Display On/Off	●	
Sensor controls	Popcorn ● ● Beverage ● ● Reheat ● ● Vegetable ● ● Potato ● ● Chicken/Fish ● ●	
Express Cook	1-6 min.	
Instant On controls	●	
Time cook	I & II	
Add 30 Seconds	●	
Auto/Time Defrost	●	
Power levels	10	
Turntable	●	
Kitchen timer/timer on/off	—/●	
Delay Start/Reminder	●	
Cooking complete reminder	●	
Child lockout	●	
Appearance		
Color appearance*	SS WW, CC, BB Black White, Bisque, Black	
Case color	Stainless steel White, Bisque, Black	
Door color	Stainless steel White, Bisque, Black	
Weights & Dimensions		
Approx. shipping weight (lbs.)	55 53	
WxHxD (in inches)	Cavity 16-11/16 x 11-1/4 x 18-1/16 Exterior** 23-15/16 x 13-13/16 x 19-1/4	
Power/Ratings		
Input Volt/Hz	120/60	
Electric input	Watts 1650	
@ 120V	Amperage 13.9	
Accessories		
Cooking guide label	●	
Right-angle plug	●	
Warranty		
Limited one-year in-home warranty***	●	
Limited five-year magnetron warranty***	●	

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black

**Exterior dimensions: height includes feet, depth does not include handle.

***See written warranty for details.

GE Café microwave oven

	GE Café	
	CVM2072SM	
Capacity		
Oven cavity (cu. ft.)	2.0	
Features		
Watts (IEC-60705 test procedure)	1100	
EasyGuide menu system	●	
Sensor controls	●	
Power levels	10	
Dual-distribution cooking system	●	
Kitchen timer	●	
315-CFM vent fan/Boost	4-speed / ●	
Cavity lighting	Halogen	
Cooktop lighting	Halogen	
Recessed turntable	●	
Turntable on/off	●	
Easy-mount installation	●	
"COOK" Touch control features	Express Cook Instant-on 30 sec. & 1-7 minutes	
REHEAT Touch control features	Time Cook and Time Cook I & II ● Add 30 Seconds ● Select food ● Select beverage ● Soften ● Melt ● Delay Start ●	
DEFROST Touch control features	Select Food/Beverage ● Select time ● Select weight ● Select food ● 1 lb. Quick Defrost ● Soften ● Melt ● Delay ●	
CUSTOM 1 and 2 Touch Controls	●	
OPTIONS Touch Reminder (24 hr.)	●	
control features	Beeper volume ● Filter reminder ● Clock w/Clock Saver ● Child lockout ● Cooking complete reminder ● Display On/Off Auto sleep mode ● Help key ● Sleep mode/Wake-up touch ● Programmable night light ● Interactive demo mode ●	
Appearance		
Color appearance*	SS	
Case color	Graphite grey with tactile vent/light buttons	
LED, LCD display control panel	●	
Sculptured handle	●	
Weights & Dimensions		
Overall oven interior dimensions WxHxD (in inches)	21-9/16 x 10-9/16 x 14-13/16	
Approx. shipping weight (lbs.)	72	
Power/Ratings		
Input Volt/Hz	120 V/60 Hz	
Input Amps/Watts (max)	15A/1.58 KW	
Accessories		
Oven rack(s)	2 (2 positions)	
Recirculating charcoal filter kit (opt.)	JX81H	
Filler panel kit (optional for 36" installation)	JX52BL	
Warranty		
Limited one-year in-home warranty**	●	
Limited five-year magnetron warranty**	●	

*SS = Stainless steel.
**See warranty for details.

GE Profile™ and GE Café™ dishwashers



PDW9980N

GE Profile stainless interior dishwasher with hidden controls

- SmartDispense™ technology*
- Angled Rack Dry™ system*
- Single Rack Wash™ selection
- QuietPower7™ sound package with concealed ActiveVent
- Countdown display with 1-24 hour Delay Start
- 100% fold-down tines and adaptable bowl tines in lower rack*
- SpeedCycle™



ONLY 47 dBA



PDW7880N

GE Profile built-in dishwasher

- Giant tub with maximum capacity nylon racking
- Four-position adjustable upper rack
- 4 utility shelves with StemSafe™ in upper rack
- 100% fold-down tines in lower rack*
- Light-touch electronic controls with 6 status lights
- Countdown display with 1-9-hour Delay Start
- Glasses selection



ONLY 54 dBA



PDW7300N

GE Profile built-in dishwasher

- One-piece color wrap contour door*
- Giant tub with maximum capacity nylon racking
- Four-position adjustable upper rack
- Countdown display with 1-9-hour Delay Start
- 6-level BrilliantClean™ towerless wash system with CleanSensor™
- QuietPower4 sound package
- SpeedCycle



ONLY 54 dBA



CDW9380N

GE Café stainless interior dishwasher with hidden controls

- GE Café stainless door handle
- SmartDispense technology*
- 6-level BrilliantClean towerless wash system with CleanSensor
- Giant tub with maximum capacity nylon racking
- QuietPower6 sound package with concealed ActiveVent
- 2/4/8-hour Delay Start
- 2 sets fold-down tines in lower rack



ONLY 48 dBA



* Only GE has it!

GE Profile and GE Café stainless interior dishwashers

	GE Café	GE Profile
	CDW9380NSS	PDW9980NSS PDW9900NWW PDW9900NBB
ENERGY STAR®	●	●
Features		
SmartDispense technology	47 fl. oz.	47 fl. oz.
Front appearance	Stainless steel	Contour door
Upscale flush design	●	●
Full-length door design	Fully integrated	Fully integrated
Wash system	BrilliantClean	BrilliantClean
Wash arms	3 direct-feed	3 direct-feed
Wash levels	6-towerless	6-towerless
Water filtration	100% triple w/ExtraFine™ filter	100% triple w/ExtraFine™ filter
Dual pumps and motors	●	●
Hard food disposer	Piranha™	Piranha
Sensor	CleanSensor	CleanSensor
Automatic temp. control	●	●
Rinse aid dispenser	w/indicator and adjustment	w/indicator and adjustment
Electronic controls	Light-touch, hidden controls	Light-touch, hidden controls
Cycle progress indicators	1 "Clean" light, 1 "Sanitized" light	Countdown display with 6 status lights
Touchpads	Top controls	Top controls
Selections/Enhancements	5/5*	8/6*
Last cycle memory	●	●
Audible end-of-cycle signal	●	●
Selections		
Single Rack Wash	●	●
Anti-bacterial (NSF**)	●	●
Cookware	●	●
Normal Wash	●	●
China/Crystal	●	●
Glasses Cycle	●	●
SpeedCycle (wash & dry)	●	●
Rinse Only	●	●
Enhancements		
Delay Start	2/4/8-hour	1-24-hour
Hi-Temp Wash	Added heat	Added heat
Hi-Temp Rinse	Auto w/added heat	Auto w/added heat
PreWash	●	●
Heated Dry	●	●
HotStart™	Automatic	Automatic
Child lock	●	●
Racking		
Maximum capacity nylon racking	Gray	Pearlescent™
Adjustable upper rack with CleanTip tines		4-position
Removable upper rack†	Nylon deep-tiered	Nylon deep-tiered
Upper rack handle	●	●
Lower rack handle	●	●
Fold-down tine flexibility	2 lower	Angled Rack Dry; 100% and adaptable bowl tines, lower
Utility shelves	2 upper	3 Pearlescent StemSafe upper
Silverware basket	1-pc. with 3 cell covers	3-pc. with ExtraBasket™
Cutlery tray	●	●
Hard countertop installation	Included	Included
Door handle	GE Café stainless	Sculptured
DryIndex		
Calrod® heating element	Multi-wattage	Multi-wattage
Convection airflow	●	●
Fan-assist dry	●	●
Angled Rack Dry system	●	●
Quiet		
Sound insulation package	QuietPower6—48 dBA	QuietPower7—47 dBA
Tube insulation	Thininstall™ with heat-bonded bitumen	Thininstall Plus with heat-bonded bitumen
Door insulation	Bitumen	Bitumen and foam
QuietPower motor	●	●
ActiveVent system	Concealed	Concealed
Tube collar trim	●	●
Quiet water valve	●	●
Appearance		
Colors available***	SS	SS, WW, BB
Weights and Dimensions		
Height w/legs retracted (in.)	34	34
Height w/legs removed (in.)	33-13/16	33-13/16
Overall width (in.)	24	24
Overall depth (in.)	24-3/4 †	24-3/4 ††
Approx. shipping wt. (lbs.)	105	105

*Sensor controlled.

**Certified by National Sanitation Foundation.

***SS = Stainless steel, WW = White on white, BB = Black on black.

†For best results, use shower nozzle attachment when upper rack is removed.

††Add 1/2" for deepest part of contour door. Allow an additional 2 inches for the handle.

‡Allow an additional 2.525" for the handle on CDW9380 series models.

Built-in dishwashers

	GE Profile	
	PDW7880NSS PDW7800NWW PDW7800NCC PDW7800NBB	PDW7380NSS PDW7300NWW PDW7300NCC PDW7300NBB
ENERGY STAR	●	●
Features		
PermaTuf®	PermaTuf®	PermaTuf
Front appearance	Contour door	Contour door
Upscale flush design	●	●
Full-length door design	One-piece color wrap	One-piece color wrap
Wash system	BrilliantClean	BrilliantClean
Wash arms	3 direct-feed	3 direct-feed
Wash levels	6-towerless	6-towerless
Water filtration	100% triple with ExtraFine™ filter	100% triple with ExtraFine™ filter
Dual pumps and motors	●	●
Hard food disposer	Piranha	Piranha
Sensor	CleanSensor	CleanSensor
Automatic temperature control	●	●
Rinse aid dispenser	w/indicator & adjust.	w/indicator & adjust.
Electronic controls	Light-touch	Light-touch
Cycle progress indicators	Countdown display w/6 status lights	Countdown display w/6 status lights
Touchpads	12	11
Selections/Enhancements	7/6*	6/6*
Last cycle memory	●	●
Selections		
Anti-bacterial (NSF**)	●	●
Cookware	●	●
Normal Wash	●	●
China/Crystal	●	●
Glasses Cycle	●	●
SpeedCycle (wash & dry)	●	●
Rinse Only	●	●
Enhancements		
Delay Start	1-9-hour	1-9-hour
Hi-Temp Wash	Added heat	Added heat
Hi-Temp Rinse	Auto w/added heat	Auto w/added heat
PreWash	●	●
Heated Dry	●	●
HotStart™	Automatic	Automatic
Child lock	●	●
Racking		
Maximum capacity nylon racking	White	White
Adjustable upper rack with CleanTip tines	4-position deep-tiered	4-position deep-tiered
Fold-down tine flexibility	4 sets with 2 multi-position, upper; 100% lower	2 sets with 1 multi-position, upper; 2 lower
Utility shelves	4 w/StemSafe upper	4 w/StemSafe upper
Silverware basket	3-pc. with ExtraBasket	3-pc. w/3 cell covers
Hard countertop installation	Included	Included
Latch	Squeeze	Squeeze
DryIndex		
Calrod heating element	Multi-wattage	Multi-wattage
Convection airflow	●	●
Quiet		
Sound insulation package	QuietPower4 – 54dBA	QuietPower4 – 54dBA
Tube insulation	Thininstall Plus	Thininstall Plus
Door insulation	Mastic and insulation	Mastic and insulation
QuietPower motor	●	●
ActiveVent system	●	●
Tube collar trim	●	●
Electronic control system	●	●
Quiet water valve	●	●
Appearance		
Colors available***	SS, WW, CC, BB	SS, WW, CC, BB
Weights & Dimensions		
Height w/legs retracted (in.)	34	34
Height w/legs removed (in.)	33-13/16	33-13/16
Overall width (in.)	24	24
Overall depth (in.)	24-3/4 †	24-3/4 †
Approx. shipping weight (lbs.)	90	90

*Sensor controlled.

**Certified by National Sanitation Foundation.

***SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

†Add 1/2" for deepest part of contour door.



Listed by
Underwriters
Laboratories

GE Profile™ clothes care system



WPGT9360E

GE Profile Harmony™ 4.0 cu. ft.* king-size capacity washer

- HydroHeater™ internal water heater
- HydroView™ glass lid
- English/Spanish LCD option
- Full electronic controls with touchscreen
- Direct-drive motor with adaptive spin speed combinations
- HydroWash™ system with Infusor™
- Flow-Thru™ dispensing system
- Stain Inspector™ system
- Stainless steel basket
- Adaptive water levels
- 1010-RPM spin speed

*Washes equivalent amount of clothes as 4.0 cu. ft. agitator machine per IEC ratios



DPGT750EC/GC

GE Profile Harmony™ 7.3 cu. ft. king-size capacity dryer

- English/Spanish LCD option
- Full electronic controls with touchscreen
- DuoDry™ system
- Delicate Cycle with extra-low heat setting
- Stainless steel drum
- 5 heat selections
- Adaptive cool-down
- Wrinkle care extended tumble
- Venting capability of up to 150 ft. of equivalent ducting

GE® washers and dryers



WCVH6260H

GE 3.7 cu. ft. king-size capacity frontload washer

- HydroMotion™ wash action
- HydroHeater™ internal water heater
- Load sensing adaptive fill
- 5 with sanitize wash/rinse temperatures
- 1000 RPM spin speed
- Quiet-by-Design™
- Custom cycle
- 26 wash cycles



DCVH515EF/GF

GE 7.0 cu. ft. super capacity frontload dryer

- Sensor Dry Plus™
- Dewrinkle cycle
- 5 heat selections
- Rotary electronic controls with LED indicators
- Deluxe dryer rack
- Adjustable end-of-cycle signal
- Custom cycle



WBVH5100H

GE 3.6 cu. ft. king-size capacity frontload washer

- HydroMotion wash action
- PerfectTemp™ water temperature system
- Load sensing adaptive fill
- 4 wash/rinse temperatures
- 1000 RPM spin speed
- QuietBalance™ suspension system
- 14 wash cycles
- Cycle countdown display with LED indicators



DBVH510EH/GH

GE 7.0 cu. ft. super capacity frontload dryer

- Sensor Dry Plus
- Dewrinkle cycle
- 4 heat settings
- Delay start up to 10 hours
- TrueGrip™ handle
- Cycle countdown display with LED indicators
- DuraDrum™ interior
- End-of-cycle signal

GE Profile and GE washers

	GE Profile	GE	
	WPGT9360E	WCVH6260H	WBVH5100H
ADA-compliant		●	●
Capacity			
Capacity cu. ft.	4.0* King-size	3.7* King-size	3.6* King-size
Energy			
ENERGY STAR®	●	●	●
Controls			
Control type	Electronic LCD touchscreen display	Electronic	Electronic
Status indicators	LCD display	Cycle status lights with LED indicators	Cycle status lights with LED indicators
Cycle countdown	LCD		
Adaptive capabilities	Water levels	Load size	Load size
HydroWash	●		
HydroMotion wash		●	●
HydroHeater	●	●	
SudsLogic™		●	●
Water temp system	RightTemp	HydroTemp™ ⁵	PerfectTemp
Wash/rinse temps	4	5 with sanitize	4
Water levels	Adaptive fill	Automatic	Automatic
Wash system			
Wash basket	Stainless steel	Stainless steel	Stainless steel
Wash mechanism	Infusor		
Wash/spin combinations	Multiple	6	5
Drive system			
Variable-speed motor	Direct drive		
Maximum spin speed	1010 RPM	1000 RPM	1000 RPM
Dispensers			
Bleach	Flow-Thru timed	●	●
Fabric softener	Flow-Thru timed	●	
Detergent	Flow-Thru timed	●	●
Wash Boost	Flow-Thru timed		
Auxiliary		●	
Signals			
End-of-cycle	Variable	Adjustable	Adjustable
Add bleach	Variable		
Wash cycles			
Number of cycles	Multiple	26	14
Custom cycles	6		
Cycle selections			
Whites/cottons	●	●	●
Colors	●	●	●
Dark colors	●		
Easy care	●	●	●
Handwash	●	●	●
Delicates		●	
Specialty cycles	Multiple	Active wear	
Program options			
Stain wash	Stain Inspector	●	●
Extra heavy soil	Super Clean		
Heavy soil	●	●	●
Medium soil	●	●	●
Light soil	●	●	●
Extra light soil	●	●	●
Special cycles			
Delay start	●	●	●
Speed wash	Quick Clean	●	●
Prewash	●	●	
2nd rinse	●	●	●
Extended spin	●		
Drain and spin		●	●
Rinse and spin	●		
Spin only	●		
Additional features			
Quiet performance	Supreme	Quiet-by-Design	Quiet-by-Design
HydroView glass lid	●		
Door style		See-thru-glass	See-thru-glass
English/Spanish LCD option	●		
Leveling legs		●	●
Handle		TrueGrip™	TrueGrip
Pedestal available at additional cost		●	●
Stacking kit available at additional cost		GEFLSTACK	GEFLSTACK
Appearance			
Backsplash color	Platinum or White		
Colors available**	PL, WW	WW	WW
Weights & Dimensions			
Approx. ship. weight (lbs.)	155	225	225
Flexible installation		Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side
Power/Ratings			
Circuit breaker or Time delay fuse		15 or 20 Amps	15 or 20 Amps
Volts/Hertz		120V/60Hz	120V/60Hz

*Washes equivalent amount of clothes as a similar cubic foot agitator machine per IEC ratios.

**PL = Dark Platinum, WW = White on white.

GE Profile and GE dryers

	GE Profile	GE	
	DPGT750EC/GC	DCVH515EF/GF	DBVH510EH/GH
ADA-compliant		●	●
Capacity			
Capacity cu. ft.	7.3 King-size	7.0 Super	7.0 Super
Controls			
Control type	Electronic	Rotary-electronic	Rotary-electronic
Status indicators	LCD	Cycle status lights with LED indicators	Cycle status lights with LED indicators
Cycle countdown	LCD		
Adaptive logic	●		
Heat selections	5	5	4
Dry system			
Clothing moisture sensor	DuoDry	Sensor Dry Plus	Sensor Dry Plus
Temperature sensor	Thermistors	Dual thermistors	Dual thermistors
Dryer drum	Stainless steel	DuraDrum	DuraDrum
Drum baffles	Dark Platinum		
Dual motors	●		
Signals			
End-of-cycle	Variable	Adjustable	
Damp dry		●	
Dry cycles			
Number of cycles	Multiple	Multiple	Multiple
Custom cycles	6	●	●
Cycle selections			
Cottons	●	●	●
Mixed loads	●	●	●
Easy care	●	●	●
Knits sweaters	●		
Delicates	●	●	●
Antibacterial cycle		●	
Specialty cycles	Multiple		
Program options			
More dry	●	●	●
Dry	●	●	●
Less dry	●	●	●
Damp dry	●	●	●
Timed dry			
Time control	Electronic	Electronic	Electronic
Special cycles			
Dryer® cycle	●		
Delay start	●		
Add time option	●	●	●
Dewrinkle	●	●	●
Quick Fluff (no heat)	●		
Additional features			
Quiet performance	Supreme		
Quiet drum	●		
Deluxe dryer rack	●	●	
Dryer interior light	●	●	●
Extended venting capability	Up to 150 ft.		
Clean lint filter reminder	●		
English/Spanish LCD option	●		
100% front serviceable		●	●
Reverse-a-Door	●	●	●
Door style		See-thru-glass	See-thru-glass
Leveling legs		●	●
Exhaust options E/G		4/3	4/3
Handle		TrueGrip	TrueGrip
Pedestal available at additional cost		●	●
Appearance			
Backsplash color	Platinum or White		
Colors available*	PL, WW	WW	WW
Weights & Dimensions			
Approx. shipping weight-E/G	155/155	125/130	125/130
Flexible installation		Undercounter, stacked, side-by-side	Undercounter, stacked, side-by-side

*PL = Dark Platinum, WW = White on white, WT = Titanium.

GE® frontload washer and dryer



WCVH6600H

GE frontload 3.8 cu. ft.* king-size capacity washer

- HydroMotion™ wash action
- HydroHeater™ internal water heater
- Load sensing adaptive fill
- 5 with sanitize wash/rinse temperatures
- 1100 RPM spin speed
- Chrome door trim and knob
- QuietBalance™ suspension system
- 26 wash cycles
- Cycle countdown display with LED indicators
- Delay start up to 18 hours



DCVH660EH/GH

GE frontload 7.0 cu. ft. super capacity dryer

- Sensor Dry Plus™
- 5 heat selections
- Chrome door trim and knob
- Delay start up to 18 hours
- Antibacterial cycle
- TrueGrip™ handle
- Cycle countdown display with LED indicators
- DuraDrum™ interior

*Washes equivalent amount of clothes as similar cubic foot agitator machine, per IEC ratios.



Side-by-side
with pedestals



Side-by-side



Custom built-in/
custom under
counter



Stacked



SBSD137H

Pedestal for use with frontload washer and dryer

This optional 13" pedestal raises the door opening and the height of the washer or dryer. Feet on pedestal allow it to adjust to 13-3/8" height.

GE frontload washer

GE	
WCVH6600H	
Capacity	
Capacity	King-size
Cubic feet	3.8*
Features	
ADA Compliant	●
ENERGY STAR®	●
Wash/rinse temperatures	5 with sanitize
Water levels	Automatic
HydroMotion wash	●
HydroHeater	●
SudsLogic™	●
Number of cycles	26
Specialty cycles	Active wear
Detergent dispenser (liquid/powder)	●
Bleach dispenser	●
Fabric softener dispenser	●
Auxiliary dispenser	●
Control type	Electronic
End-of-cycle signal	Adjustable
Wash/spin speed combinations	6
RPM spin speed	1100
Water temperature system	HydroTemp™5
Colors	●
Delicates	●
Easy Care	●
Handwash	●
Whites	●
Optional soil levels—Extra Light	●
Optional soil levels—Heavy Soil	●
Optional soil levels—Light Soil	●
Optional soil levels—Normal Soil	●
2nd rinse	●
Adaptive capabilities	Load size
Cycle countdown	with LED indicators
Cycle status lights	●
Delay start	●
Drain and spin	●
Prewash	●
Speed wash	●
Stain wash	●
Door style	See-thru glass
Noise package	Quiet-by-Design™
Leveling legs	●
Stainless steel wash basket	●
Handle	TrueGrip
Pedestal available at additional cost	●
Stacking kit available at additional cost	GEFLSTACK
Appearance	
Colors available**	WW, GG, BB, MS
Weights & Dimensions	
Approx. shipping weight (lbs.)	225
Flexible installation	Undercounter, stacked, side-by-side
Power/Ratings	
Circuit breaker or Time delay fuse	15 or 20 amps
Volts/Hertz	120V; 60Hz

*Washes equivalent amount of clothes as a similar cubic foot agitator machine, per IEC ratios.
**WW = White on white, GG = Granite gray, BB = Black on black, MS = Metallic silver

GE frontload dryer

GE	
DCVH660EH/GH	
Capacity	
Capacity	Super
Cubic feet	7.0
Features	
ADA Compliant	●
Moisture sensor	Sensor Dry Plus
Control type	Rotary-electronic
Cycle countdown	with LED indicators
Cycle status lights	●
Dual thermistors	●
Heat selections	5
Number of cycles	Multiple
Cotton cycle	●
Custom cycle	●
Delicate cycle	●
Easy Care cycle	●
Mixed loads cycle	●
Antibacterial cycle	●
Optional dryness levels—Damp	●
Optional dryness levels—Dry	●
Optional dryness levels—Less dry	●
Optional dryness levels—More dry	●
Timed dry—actual minutes on timer	90
Add Time	●
Dewrinkle	●
Damp dry signal	●
Dryer interior light	●
Dryer rack	Deluxe
End-of-cycle signal	Adjustable
100% front serviceable	●
Door style	See-thru glass
Drum interior	DuraDrum
Leveling legs	●
Reverse-a-Door	●
Exhaust options (electric/gas)	4/3
Handle	TrueGrip
Pedestal available at additional cost	SBSD137H
Appearance	
Colors available*	WW, GG, BB, MS
Weights & Dimensions	
Approx. shipping weight (lbs.) E/G	125/130
Flexible installation	Undercounter, stacked, side-by-side

*WW = White on white, GG = Granite gray, BB = Black on black, MS = Metallic silver.

GE makes builders' lives easier.

GE gives you all the tools you need to manage and grow your business.



- An industry-leading company committed to customer satisfaction.
- America's #1 preferred appliance brand.*
- A nationwide network of sales professionals and service technicians wholly dedicated to the builder community. **800.GE.CARES.**

*GE is the appliance brand most often mentioned among the brands rated as offering the best products and services in America. Source: Harris Poll 2006.



- 24-hour accessibility through award-winning technology
 - GECustomerNet.com**
 - GESelectionCenter.com**
 - ge.com**
- GE Answer Center® saves you time by providing answers on product features. **800.626.2000.**



- Project planning made simple with Quick Specs
- Product features and dimensions are faxed to you FREE, wherever and whenever you need them. **800.432.3729.**



GE Consumer & Industrial
Appliances
General Electric Company
Louisville, KY 40225
ge.com

As an ENERGY STAR® partner, GE has determined that the appliances marked with the ENERGY STAR logo meet the ENERGY STAR guidelines for energy efficiency.

Before purchasing an appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer or ge.com

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.