



Floor Keeper™
Rubber Entrance Barrier Matting

Johnsonite®
Flooring Solutions to Integrate Design & Life-Safety

Floor Keeper™ Rubber Entrance Barrier Matting

The Entrance Solution

Floor Keeper™ Entrance Barrier Matting is a flexible system composed of rubber and nylon-fiber carpeting working in concert to protect interior floor surfaces from adverse conditions that prematurely cause abnormal wear and increased maintenance costs. Floor Keeper works quietly to help remove solid and liquid debris from pedestrian traffic. When considering performance characteristics

Help protect high-traffic interior floors and reduce maintenance costs with this quiet and comfortable alternative to metal framed matting.

and cost-effectiveness, Floor Keeper Matting is an ideal alternative to more costly metal matting for air-lock environments or interior spaces.

Patented Rubber Matting System

The matting inserts incorporate uniquely shaped, solution-dyed, nylon-fiber yarn into a patented carpet-and-rib system. These inserts are manufactured by twisting mono and multifilaments together. This unique method makes them without equal for scraping, absorbing and concealing dirt and moisture. The rubber ribs flex under foot to loosen grit and grime. This dirt is then held by the fibers for later collection. There is no need to empty water from the matwell except under extremely wet conditions, because soil and moisture are held above the well for evaporation or removal.

Non-Metal Construction is Quiet and Permits More Efficient Use of Theft-Deterrent Systems

Without the presence of aluminum or metal, magnetic theft-deterrent systems can be more sensitively tuned for greater theft detection. This may result in hidden cost savings over time for retail applications. Conforming to most flooring conditions, Floor Keeper will not lift, rock or chatter when traversed by pedestrian or cart traffic.

The resilient rubber compound is softer and more user-friendly for everyone, young and old.

On-Site Trimming Means a Perfect Fit Every Time and Custom Shape Capabilities

Floor Keeper Matting is ordered oversized and cut with a utility knife on-site for a perfect fit to the matwell. Unique shapes and logos can easily be trimmed into place to create custom looks from stock materials. No assembly is required with Floor Keeper Matting.

The Floor Keeper Economic Advantage*

	Floor Keeper Rubber Matting	Aluminum Framed Mats
Material	\$28.00	\$30.00
Installation	\$2.00	\$5.00
Maintenance	\$6.25	\$9.75
Total Cost	\$36.25	\$44.75

* Estimated costs per square foot over a one-year period for an 8' x 12' recessed area. Costs may vary depending on local installation and maintenance rates.

Maintenance

Daily: Vacuum with wet vac if appropriate.
Weekly: Use a stiff nylon broom or automatic scrubber with neutral floor cleaner. Complete instructions available with all material, on www.johnsonite.com or by calling Johnsonite.

Installation

RECESSED Floor Keeper Matting is loose-laid into the matwell frame. Install SURFACE MOUNTED Floor Keeper Matting using Johnsonite #945 Contact Bond or #905 Releasable Adhesive. Refer to Johnsonite's complete installation instructions included with each shipment, on www.johnsonite.com or call Johnsonite for a copy.

Warranty

Limited, two-year warranty. Contact Johnsonite for details.

Architectural Specifications Rubber Entrance Barrier Matting

The rubber entrance barrier matting furnished under this specification shall BE JOHNSONITE® FLOOR KEEPER™ RUBBER ENTRANCE BARRIER MATTING with patented nylon-fiber carpet inserts in an overall thickness of _____ [specify .500" (12mm) gauge for surface mounted applications or .750" (17mm) gauge for matwell installations], and a 19-5/8" (50cm) wide by 78-3/4" (2.0m) long size. The mat color shall be _____ (specify by color number and name), and the carpet insert color shall be _____ (specify by color number and name). FOR THE JOHNSONITE WARRANTY TO APPLY, the "surface mounted" rubber entrance barrier matting and accessories shall be installed with Johnsonite #945 Contact Bond or #905 Releasable Adhesive, and the "matwell installed" rubber entrance barrier matting shall be installed in the Johnsonite Aluminum Matwell Frame designed specifically for the matting.

Patent No.: 5,529,825


PRODUCT INFORMATION

Component	Dimensions	Application
Rubber Barrier Mat BM-17 Black GM-17 Grey	3/4" H x 19-5/8" W x 78-3/4" L (17mm x 500mm x 2.0m)	Recessed into matwell
BM-12 Black GM-12 Grey	1/2" H x 19-5/8" W x 78-3/4" L (12mm x 500mm x 2.0m)	Surface-mounted
Spacer Strip BSPA-017 Black GSPA-017 Grey	3/4" H x 1" W x 19-3/4" L (17mm x 25mm x 502mm)	Use perpendicular to carpet strips every 13'
BSPA-012 Black GSPA-012 Grey	1/2" H x 1" W x 19-3/4" L (12mm x 25mm x 502mm)	
Reducer Ramp BRAM-012 Black GRAM-012 Grey	1/2" H x 2" W x 11' 5-3/4" L (12mm x 50mm x 3.5m)	To reduce edges of 1/2" surface-mounted mat
Aluminum Matwell Frame FRA-03 I	1" H x 1" W x 13' L (25mm x 25mm x 4.0m)	To form well for 3/4" mat installation


Available Colors	Specify Color
Mat	Black (standard), Dark Grey (special order only)
Carpet Insert Strips	Steel, Turf, Lava, Cobalt, Forest, Chestnut, Apple, Space, Sparks

TEST FOR	ASTM	RESULTS
Flammability	D 2859 (pill test)	Self-extinguishing
Hardness	D 2240	Shore A = 60

Floor Keeper 3/4" Matting for recessed application in standard matwell frames

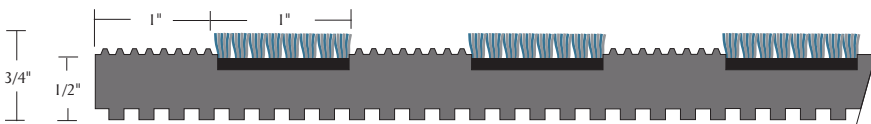

Floor Keeper 1/2" Matting for surface-mounted application or shallow frames

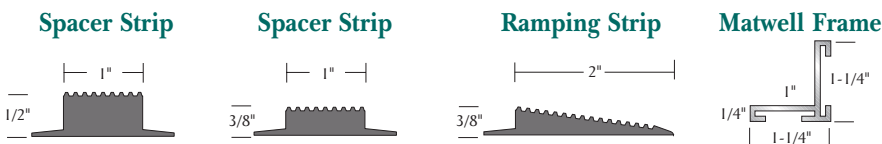


Distinct Advantages of the Floor Keeper System Over Metal Systems

- Solution-dyed fibers hold their color.
 - Patented carpet system helps to contain liquids for evaporation or removal.
 - Soft and flexible under foot; quiet and comfortable.
 - Will not rock or chatter with foot or cart traffic.
 - No special tools or skills required to install or maintain.
 - Cleans in place; no lifting of mat to remove dirty liquids.
 - Trims on-site; no assembly required.
 - Cut custom shapes and logos from stock-sized mats.
 - Non-metal system allows more efficient use of anti-theft devices.
 - Immediate availability; all shapes and sizes are cut from stock material.
- Nine exciting carpet inserts are available (see back cover).
 - Choose Black (standard) or Dark Grey (special order) rubber matting.
 - Both 3/4" and 1/2" matting are standard in Black.

Floor Keeper™ Rubber Entrance Barrier Matting



Steel

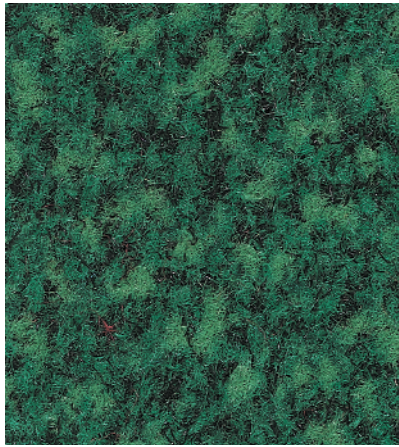


Turf



Lava




Cobalt

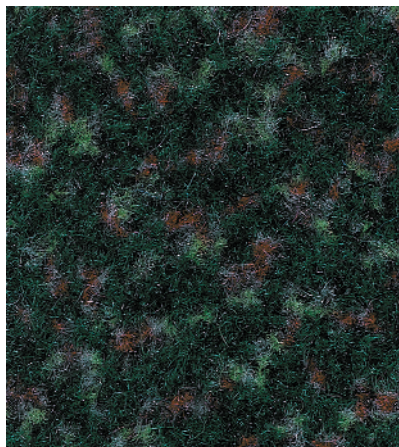


Forest




Chestnut

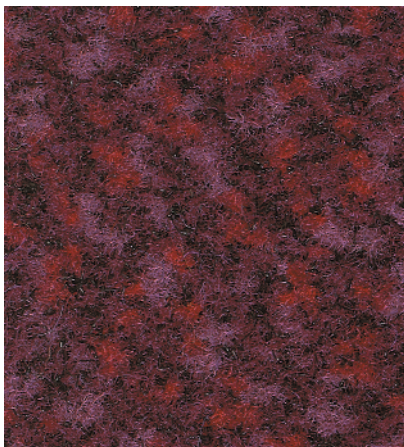

Apple

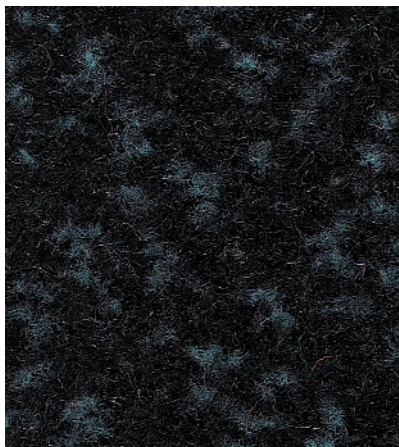

Space

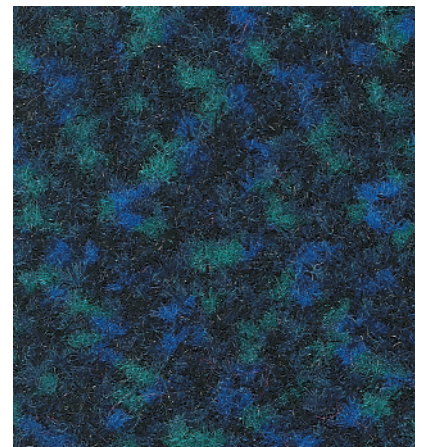

Sparks

Johnsonite[®]
Flooring Solutions to Integrate Design & Life-Safety

A Division of Duramax, Inc.
USA: (800) 899-8916 Fax (440) 543-8920
Canada: (800) 661-2162 Fax (519) 747-9155
www.johnsonite.com
e-mail: info@johnsonite.com

© 2002 Johnsonite, Div. of Duramax, Inc.
Printed in the USA 95000-791 01/02 306252